



NAME:


OASIS

DESCRIPTION:

Sound-absorbing and anti-reverberant freestanding element.
Composed of a frame with metal uprights topped with rigid felt leaves, and tables with arrangements for charging electronic equipment

APPLICATION:


- Freestanding

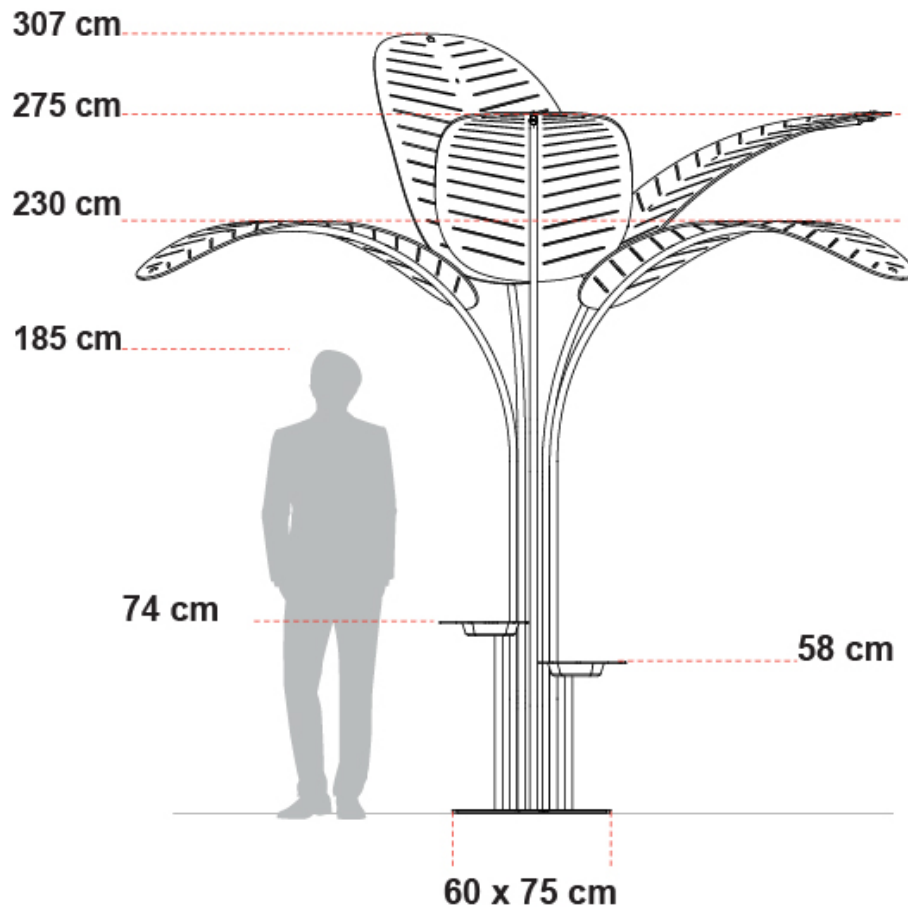

XL VERSION

DIMENSIONS:

- Base: With tables: **74,6 x 59,8 cm x THK 8 mm**
29.4 x 23.5 in x THK 0.3 in
Without tables: **Ø 60 cm x THK 8 mm**
Ø 23.6 in x THK 0.3 in
- Uprights: **Ø 3 x H 230 | 275 | 307 cm**
Ø 1.2 x H 90.5 | 108.3 | 120.8 in
- Tables: Base: **Ø 3 x H 57,8 | 73,8 cm**
Ø 1.2 x H 22.7 | 29.1 in
Shelf: **34,9 x 30,6 cm x THK 0,6 cm**
13.7 x 12 x THK 0,2 in
- Leaves: **150 x 77,8 cm x THK 1 cm**
59.1 x 30.6 x THK 0.4 in

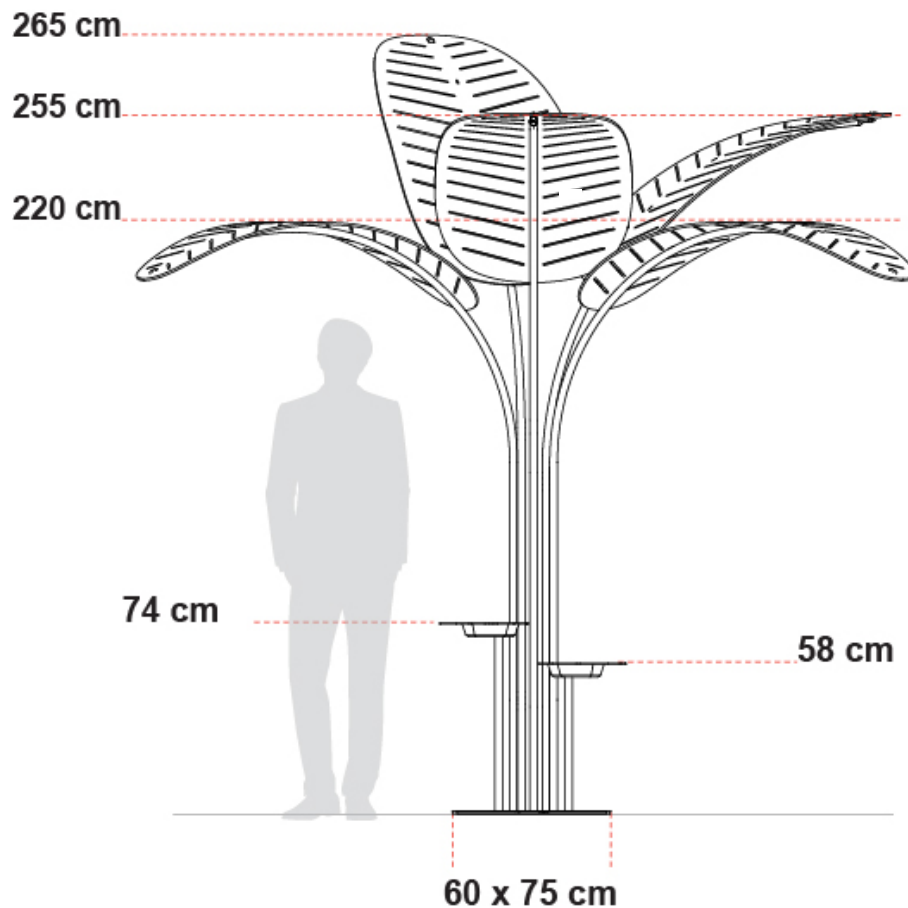

SMALL VERSION

DIMENSIONS:

- Base: With tables: **74,6 x 59,8 cm x THK 8 mm**
29.4 x 23.5 in x THK 0.3 in
Without tables: **Ø 60 cm x THK 8 mm**
Ø 23.6 in x THK 0.3 in
- Uprights: **Ø 3 x H 220 | 255 | 265 cm**
Ø 1.2 x H 86.6 | 100.4 | 104.3 in
- Tables: Base: **Ø 3 x H 57,8 | 73,8 cm**
Ø 1.2 x H 22.7 | 29.1 in
Shelf: **34,9 x 30,6 cm x THK 0,6 cm**
13.7 x 12 x THK 0,2 in
- Leaves: **150 x 77,8 cm x THK 1 cm**
59.1 x 30.6 x THK 0.4 in

COMPOSITION:

- Support element composed of:
 - Base: **74,6 x 59,8 cm x THK 8 mm (29.4 x 23.55 in x THK 8 mm)** in steel varnished with epoxy powders, completed of felt for floor protection.
 - Supporting curved uprights: S: Ø **30 x H 200 | 255 | 265 cm** - XL: Ø **30 x H 210 | 275 | 307 cm** (S: Ø **11.8 x H 78.75 | 100.4 | 104.3 in** - XL: Ø **11.8 x H 82.67 | 108.25 | 120.85 in**) prepared for fixing to the base, in steel varnished with epoxy powders.
 - Tables: uprights (Ø **30 x H 57,8 | 73,8 cm** - Ø **11.8 x H 22.75 | 29.05 in**) and shelves (**34,9 x 30,6 cm x THK 3,5 mm - 13.75 x 12.05 in x THK 3,5 mm**) prepared for fixing to the base, painted steel in oven with epoxy powders.
 - Elements of support panels:
 - Pins for hooking leaves: back (Ø **2 x H 1,8 cm - Ø 0.79 x H 0.71 in**), front (Ø **2 x L 6 cm - Ø 0.79 x L 2.35 in**) printed in ABS
 - Other informations:
 - OASIS base also available in the version without tables: Ø **60 cm x THK 8 mm (Ø 23.6 in x THK 8 mm)** in steel varnished with epoxy powders, completed of felt for floor protection.
 - Hard felt leaves:
 - **PETfelt** - 100% PET

COLOR DIFFERENCES:

Slight differences between dyeing lots are considered normal.

RECYCLABILITY:

- **PETfelt**: Material made from recycled plastic bottles, recyclable product respecting the environment.

MAINTENANCE:

Regularly and carefully use the vacuum cleaner with a smooth spout, or use soft bristle brushes or professional pads for padding and upholstery



CERTIFICATION:

• FIRE REACTION CLASS UE:

B-s2, d0 - *OPTIONAL*



• FIRE REACTION CLASS USA:

Class A - ASTM E 84-18 - *OPTIONAL*



• SOUND ABSORPTION REPORT:

UNI EN ISO 354: 2003


UNI EN ISO 11654: 1998



Sample description: HARDfelt
Mounting Type: Mounting A

Sample area: 11.13 m²
Reverberation room volume: 161.3 m³

| f [Hz] | α_s [-] |
|-----------|--|
| Frequency | Acoustic absorption coefficient values |
| 100 | -0.04 |
| 125 | 0.03 |
| 160 | 0.03 |
| 200 | 0.02 |
| 250 | 0.02 |
| 315 | 0.03 |
| 400 | 0.07 |
| 500 | 0.13 |
| 630 | 0.17 |
| 800 | 0.25 |
| 1000 | 0.39 |
| 1250 | 0.47 |
| 1600 | 0.55 |
| 2000 | 0.60 |
| 2500 | 0.68 |
| 3150 | 0.69 |
| 4000 | 0.72 |
| 5000 | 0.78 |

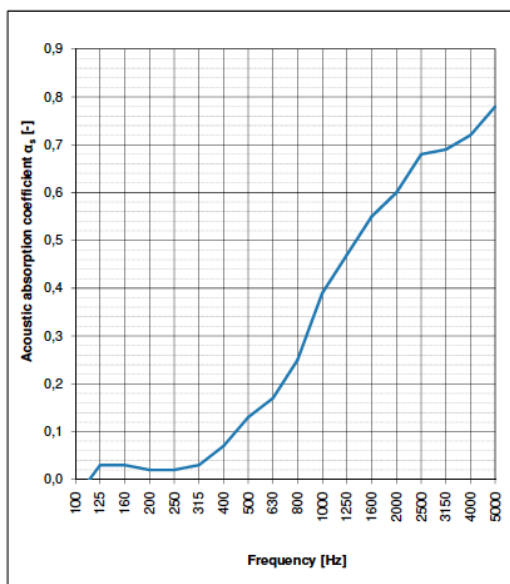

Evaluation based on laboratory measurement results by means of a technical method.

STANDARD LEAF COLOR: LA SALLE GREEN 12



White, Grey, Dark grey and Black. Other colors are available on request

STANDARD STRUCTURE COLOR: RAL 6004

painted with other **RAL** colors on request